## DESCRIPTION

278 Starter Collection ring Baffle features a direct downlight component.

| | | |
|---|---|---|
| **Catalog #** | | **Type** |
| **Project** | | |
| **Comments** | | **Date** |
| **Prepared by** | | |

## SPECIFICATION FEATURES

**Material**
Solid aluminum. Aluminum hexel louver or optional tempered sandblasted glass lense.

**Finish**
Standard: Natural Aluminum (NA) [Sustainable Design]. Premium: Matte White (MW), Lacquered Satin Aluminum (SAL), Clear Anodized Aluminum (CAL) or Custom Color (CC).

**Optics**
Refer to www.shaperlighting.com for complete photometrics.

**Ballast**
Integral electronic HPF, multi-volt 120/277V (347V Canada), thermally protected with end-of-life circuitry to accommodate the specified lamp wattage.

**Lamp/Socket**
One (1) 26W (G24q-3) 4-pin quad CFL lamp, 32W (GX24q-3) 4-pin triple CFL lamp, 100W A-19, 50PAR20H, 75PAR30LH or 90PAR38H lamp. CFL socket injection molded plastic. INC socket fired ceramic rated for 660W-250V. Lamps furnished by others.

**Installation**
Supplied with a universal circular strap for a standard 4" J-box or plaster ring.

**Options**
Tempered Sandblasted Glass Lense (TL), Acrylic Baffle - CFL only (AB), Perforated Band (PFB), Remote Emergency Battery - Supplied by others (REM), MRI applications (INC only) - Contact factory. Damp Location (DL): All Painted Finishes only. Energy Star Rating - Consult Factory.

**Labels**
U.L. and C.U.L. approved for indoor and damp location. See options for damp location finishing requirements.

**Modifications**
Shaper's skilled craftspeople with their depth of experience offer the designer the flexibility to modify standard surface luminaires for project specific solutions. Contact the factory regarding scale options, unique finishes, mounting, additional materials/colors, or decorative detailing.

# 278 SERIES

Surface Luminaire
Starter Collection
Ring Baffle

## ORDERING INFORMATION

**Sample Number: 278-INC/1/100-120V-CAL**

| Series | Lamp | Voltage | Finish | Options |
|---|---|---|---|---|
| **278** =Ring Baffle Surface | CFL/1/26<br>CFL/1/32<br>INC/1/100<br>PARH/1/90 | 120V<br>277V [1]<br>347V [1] | **Standard**<br>**NA** =Natural Aluminum<br>**Premium**<br>**CAL** =Clear Anodized Aluminum<br>**CC** =Custom Color<br>**MW** =Matte White<br>**SAL** =Lacquered Satin Aluminum | **AB** =Acrylic Baffle [1]<br>**DL** =Damp Location [2]<br>**REM** =Remote Emergency Battery [3]<br>**PFB** =Perforated Band<br>**TL** =Tempered Sandblasted Glass Lens |

**Notes:**
[1] Available with CFL only.
[2] Interior applications only.
[3] Supplied by others.

**STARTER COLLECTION**

Shaper's exclusive Starter Collection fixtures are featured throughout the Shaper product line. The concept of offering highly styled, affordable fixtures was introduced over fourteen years ago and has become one of our fastest growing lines. The design premise, basic construction, clean lines and unadorned shapes are highly desirable in modern architectural environments.

**SUSTAINABLE DESIGN**

Shaper has a long-standing history of offering environmentally-friendly fixtures. The copper and bronze alloys used in our exterior luminaires feature up to 98% recycled content, contribute less undesirable air emissions compared to painted aluminum and are easy to recycle.

**MAGNETIC RESONANCE IMAGING (MRI)**

Lighting fixtures for MRI facilities are specialized and unique, requiring non-ferrous construction. Fluorescent fixtures cannot be used due to the ferrous parts in ballasts and lampholders. Modified incandescent fixtures meet the requirements.

**ENERGY STAR**

Shaper now offers a wide variety of fixtures that can be provided with an Energy Star Rating.

Refer to the Icon Legend Link on shaperlighting.com.



**Specifications and dimensions subject to change without notice.**
Consult your representative for additional options and finishes.

ADS042715
2008-09-04 11:38:56

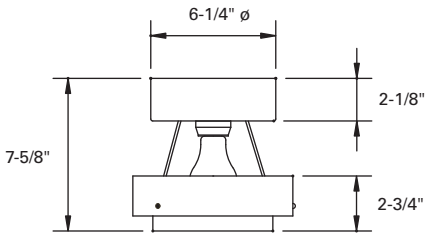


278 INC STANDARD

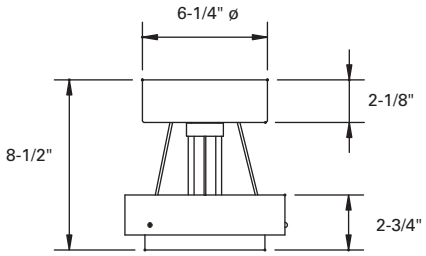


278 CFL STANDARD




## 278 OPTIONS



ACRYLIC BAFFLE (AB)



PERFORATED BAND (PFB)



TEMPERED SANDBLASTED
GLASS LENSE (TL)

## COMPANION PRODUCTS

420-RP

420

476

689